

MODULAR PSA NITROGEN GENERATORS

NIMOS NM2

Performance at inlet pressure: **7,5 bar (g)**

	LP					HP				
Nitrogen purity rate	95 %	97 %	98 %	99 %	99,5 %	99,9 %	99,95 %	99,99 %	99,995 %	99,999 %
Residual oxygen	5 %	3 %	2 %	1 %	0,5 %	0,1 %	500 PPM	100 PPM	50 PPM	10 PPM
Flow m³/h ⁽¹⁾ FND	15,9	12,2	10,3	8,9	7,0	4,4	4,0	2,8	2,2	1,5
Feed Air m³/h FAD	35,6	31,0	28,6	27,2	24,3	20,9	18,0	17,3	16,6	15,8

(1) Flow rates at standard atmospheric conditions (20°C/1000 mbar/0% RH)

Performance at inlet pressure: **9,5 bar (g)**

	LP					HP				
Nitrogen purity rate	95 %	97 %	98 %	99 %	99,5 %	99,9 %	99,95 %	99,99 %	99,995 %	99,999 %
Residual oxygen	5 %	3 %	2 %	1 %	0,5 %	0,1 %	500 PPM	100 PPM	50 PPM	10 PPM
Flow m³/h ⁽¹⁾ FND	20,0	15,2	12,7	10,8	8,4	5,5	5,0	3,5	2,8	1,6
Feed Air m³/h FAD	44,0	38,1	35,1	33,3	29,6	26,5	26,0	21,0	20,2	19,0

(1) Flow rates at standard atmospheric conditions (20°C/1000 mbar/0% RH)

Feed Air Requirements

Quality:	Class 1-4-1 ISO 8573.1 Solid < 0,1 µm Dew point < +3°C Oil < 0,01 mg/m ³
Pressure:	6 - 10 bar (g)
Temperature:	+5..... +45°C

(2) Dew point at atmospheric pressure.

(3) Necessary for guarantee performance of the nitrogen generator.

Nitrogen Specifications

Outlet pressure:	0-9 bar(g)
Dew point:(2)	< 40°C
Nitrogen process tank:(3)	10 lt


Power Requirements

Power Supply:	230 V / 50 - 60 Hz
Power Consumption:	max. 0,5 kW



Dimensions & Weight

L:	600 mm
P:	400 mm
H:	1300 mm
Weight:	150 kg

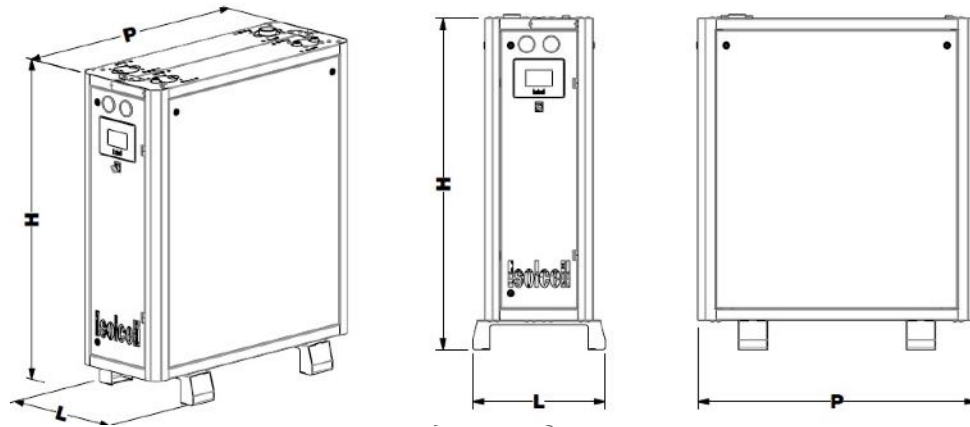

Connections

Air inlet:	G½"
N ₂ outlet:	G½"
O ₂ enriched air outlet:	G2"

STANDARD EQUIPMENT AND OPTIONS

- = standard equipment
- = option

Control panel

4 line display	●
----------------	---

Purity monitoring and control

O ₂ Electrochemical Sensor 0-25 %	○
O ₂ Zirconium Sensor 0-25 %	○
O ₂ Zirconium Sensor 10-1000 ppm	○
Dew point sensor with indication on display	○
Flow meter with indication on display	○

Valves and accessories

Back pressure control valve kit	○
Compressed air pressure sensor	○
Nitrogen buffer pressure sensor	●
Process tank pressure sensor	○
Exhaust silencer	●
Super exhaust silencer extern mounted	○

Logging and data handling

Analog output 4-20mA (O ₂ level)	●
Modbus RTU	●
Modbus RS485/USB serial converter	○
Profibus connection convert	○
Canbus connection convert	○
Webserver	○
Digital remote control	●
Extern alarm digital input	●

Necessary accessory

Process tank (Integrated)	●
---------------------------	---

